


This conventional fire alarm panel has been developed to provide a simple & reliable solution to the demands of today's fire detection solution. This model is designed user friendly & cost effective. Each zone can support up to 20 number of detectors.

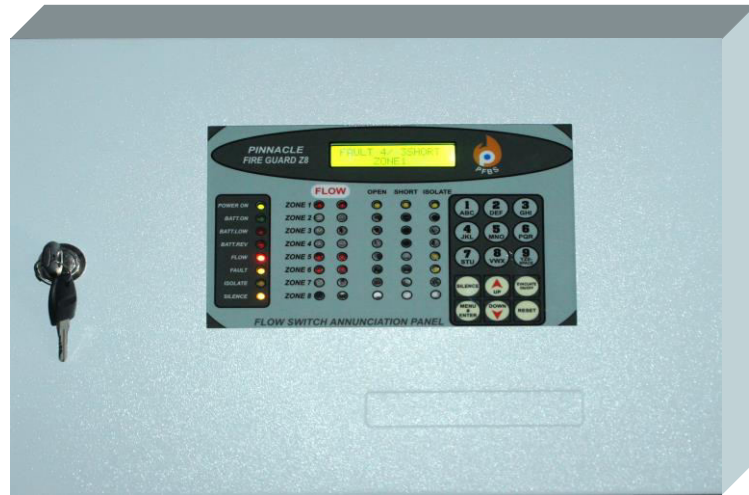

2Z - 8 ZONE SPRINKLER ANNUNCIATION ALARM SYSTEM.

Features:

- As Per IS 2189 Standard.
- 16 *2 Line Dot matrix LCD.
- Zone wise flow, open LED Indications.
- Zone wise hooter along with common hooter.
- Zone wise isolation facility.
- Extra potential free contact for integration with any other external Unit.
- Reset, alarm silence, & evacuate controls etc.
- RS 485 Communication for repeater panel.
- Zone naming facility.
- Auto dialer attachable facility .
- Inbuilt battery charger & battery space .

Specifications:

- **Operating Voltage** : Ac 220v, 50Hz + 10% voltage tolerance.
- **Operating Temperature** : 0 deg C to 50 deg C
- **Operating Humidity** : 95% [non – condensing]
- **Hooter Output** : 4 Amp, 24v DC.
- **Standby Power** : 24 VDC [2 No's of 12V, 7 AH SMF Lead Acid Batteries]
- **Color** : White Structure.